




## DIMENSIONS

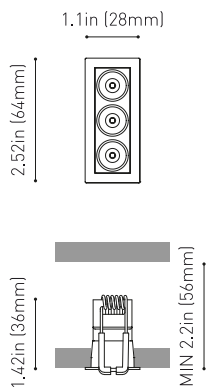

<b>Name</b>	BLACK FOSTER MICRO RECESSED 3 UL 3000K N
<b>Reference</b>	U4141011N
<b>Color</b>	Matt black
<b>Category</b>	CEILING RECESSED

## PRODUCT

<b>Type</b>	LED
<b>Gross luminous flux</b>	Depending on Mounting Accessories Lm
<b>Color temperature</b>	3000 K
<b>Chromatic stability</b>	MacAdam Step 3
<b>Color Rendering Index</b>	CRI>90
<b>Power</b>	Depending on Mounting Accessories W
<b>Current</b>	Depending on Mounting Accessories mA
<b>LED lifespan</b>	L90B10 >60.000h

## LIGHT SOURCE

<b>Lighting efficiency</b>	87%
<b>Delivered luminous flux</b>	0 Lm
<b>Light beam angle</b>	37°

## LIGHTING FIXTURE | PHOTOMETRIC DATA

<b>Driver</b>	Requires remote driver
<b>Power values of the system</b>	W
<b>Frequency</b>	Depending on Mounting Accessories
<b>Dimming</b>	Depending on Mounting Accessories

## LIGHTING FIXTURE | ELECTRICAL DATA


<b>IC Rated</b>	Yes
<b>Environmental location</b>	DAMP
<b>Recess measurements</b>	0.94x2.36 in   24x60
<b>Weight</b>	0.12 lb   55 gr
<b>Packaged weight</b>	0.24 lb   111.2 gr
<b>Packaging dimensions</b>	7.32x2.56x2.13 in   186x65x54 mm
<b>Materials</b>	Aluminium - Acrylonitrile Butadiene Styrene - Polycarbonate

## OTHER DATA




Black Foster Micro is a feat of engineering which brings the acclaimed "The Invisible Black" effect to a hyper-reduced light. Its tiny size and thin trim offer a "trimless visual" aesthetic which combines with its almost imperceptible presence as a result of its compact dimensions. Black Foster Micro is designed for general or accent lighting and can be used in projects that seek ceiling lighting that plays a minimal role.

POLAR DIAGRAM

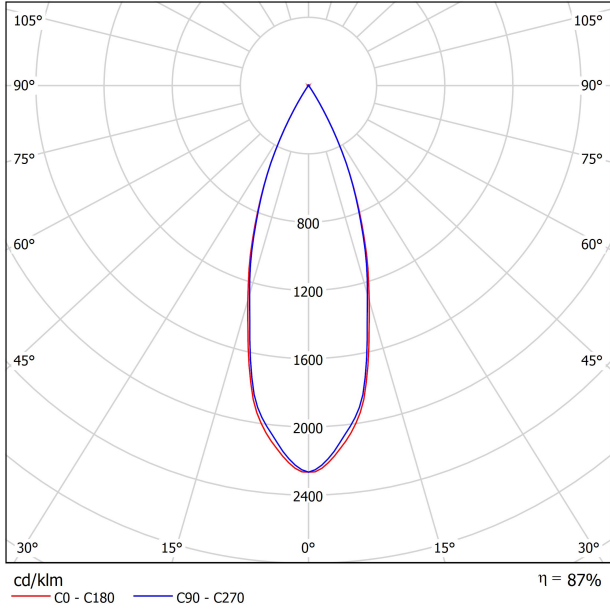

CONICAL DIAGRAM

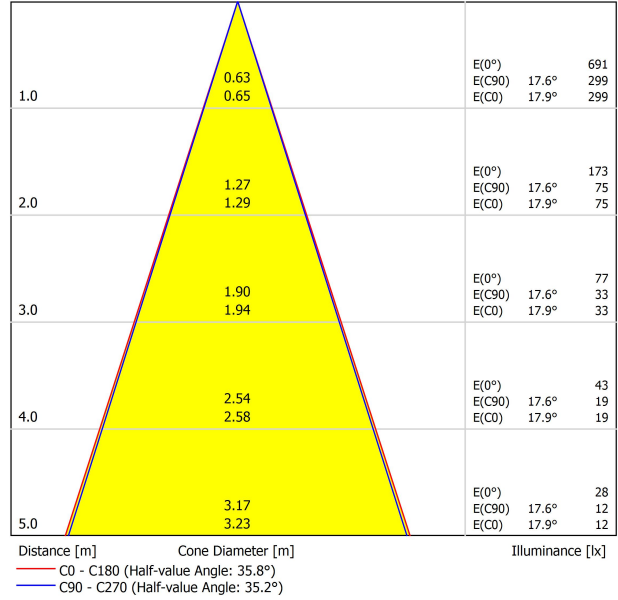

UGR

Glare Evaluation According to UGR											
ρ Ceiling	70	70	50	50	30	70	70	50	50	30	
ρ Walls	50	30	50	30	30	50	30	50	30	30	
ρ Floor	20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	-4.5	-3.9	-4.3	-3.7	-3.5	-5.2	-4.6	-5.0	-4.4	-4.2
	3H	-1.5	-0.9	-1.2	-0.7	-0.4	-2.0	-1.5	-1.8	-1.2	-1.0
	4H	0.3	0.9	0.6	1.1	1.4	-0.2	0.3	0.1	0.6	0.8
	6H	2.8	3.3	3.1	3.5	3.8	1.6	2.2	2.0	2.4	2.7
	8H	3.7	4.2	4.0	4.5	4.8	2.7	3.2	3.0	3.5	3.8
4H	12H	5.0	5.5	5.4	5.8	6.1	4.1	4.6	4.5	4.9	5.2
	2H	-3.9	-3.4	-3.6	-3.2	-2.9	-4.5	-3.9	-4.2	-3.7	-3.4
	3H	-0.5	-0.1	-0.2	0.2	0.6	-1.0	-0.6	-0.7	-0.3	0.1
	4H	1.5	1.9	1.9	2.3	2.6	1.0	1.4	1.4	1.7	2.0
	6H	4.2	4.5	4.6	4.9	5.3	3.2	3.5	3.6	3.8	4.2
8H	8H	5.3	5.6	5.7	6.0	6.4	4.4	4.6	4.8	5.0	5.4
	12H	6.8	7.0	7.2	7.4	7.8	5.9	6.2	6.4	6.6	7.0
	4H	2.3	2.6	2.7	3.0	3.4	1.9	2.1	2.3	2.5	2.9
	6H	5.1	5.4	5.6	5.8	6.2	4.3	4.6	4.8	5.0	5.4
	8H	6.5	6.6	6.9	7.1	7.5	5.7	5.8	6.1	6.3	6.8
12H	12H	8.1	8.3	8.6	8.7	9.2	7.4	7.6	7.9	8.0	8.5
	4H	2.5	2.8	2.9	3.2	3.6	2.1	2.4	2.6	2.8	3.2
	6H	5.4	5.6	5.9	6.0	6.5	4.7	4.9	5.2	5.3	5.8
8H	6.8	7.0	7.3	7.4	7.9	6.1	6.3	6.6	6.7	7.2	
Variation of the observer position for the luminaire distances S											
S = 1.0H	+4.7 / -2.2					+4.9 / -2.4					
S = 1.5H	+7.4 / -2.5					+7.6 / -2.7					
S = 2.0H	+9.4 / -2.8					+9.7 / -3.4					
Standard table Correction Summand	---					---					
Corrected Glare Indices referring to 305lm Total Luminous Flux											