




DIMENSIONS



AWARDS



| | |
|-----------|---|
| Name | BLACK FOSTER SURF 15 UL SPOT 4000K NTMG |
| Reference | U3206112NTMG |
| Color | Textured black-Metallized gold |
| Category | SURFACE |

PRODUCT

| | |
|-----------------------|-----------------|
| Type | LED |
| Gross luminous flux | 3750 Lm |
| Color temperature | 4000 K |
| Chromatic stability | MacAdam Step 3 |
| Color Rendering Index | CRI>90 |
| Power | 31.5 W |
| Current | 700 mA |
| LED lifespan | L80B10 >60.000h |

LIGHT SOURCE

| | |
|-------------------------|---------|
| Lighting efficiency | 90% |
| Delivered luminous flux | 3375 Lm |
| Light beam angle | 19° |

LIGHTING FIXTURE | PHOTOMETRIC DATA

| | |
|----------------------------|--|
| Driver | Included: ERP-PSB series or similar |
| Power values of the system | 37,00 W |
| Frequency | 50/60 Hz |
| Dimming | 0-10V / TRIAC/ELV dimming only at 120V |

LIGHTING FIXTURE | ELECTRICAL DATA

| | |
|---------------------------------|---|
| Environmental location | DAMP |
| Junction box cover | Included. For octagonal Junction box |
| Junction box cover color | Textured white. Other finishing, please consult |
| Junction box cover measurements | Ø4.33 in Ø110 mm |
| Weight | 4.52 lb 2050 gr |
| Packaged weight | 6.48 lb 2940 gr |
| Packaging dimensions | Ø5.04x28.74 in Ø128x730 mm |
| Materials | Aluminium - Acrylonitrile Butadiene Styrene - Polycarbonate |

OTHER DATA




Black Foster Surface is the product that transfers the claimed effect "The Invisible Black" to a linear system in surface application. Black Foster has a very discrete presence in the interior design due to its reduced dimensions and its extremely low glare helping the piece not to gain much prominence.

POLAR DIAGRAM



CONICAL DIAGRAM

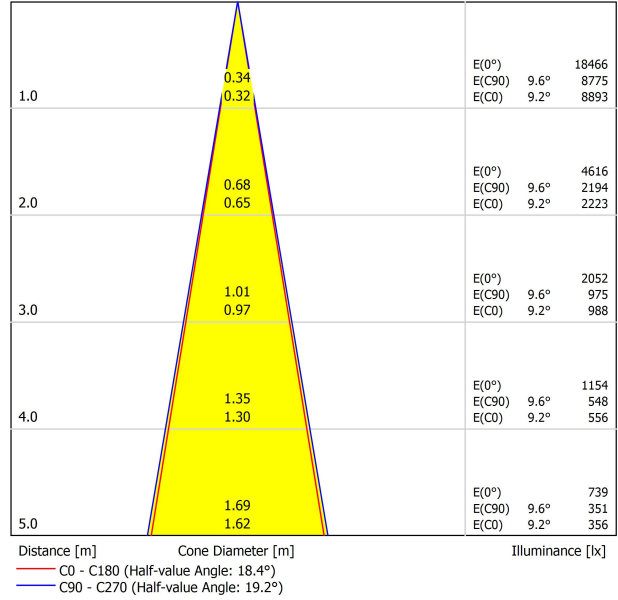

UGR

| Glare Evaluation According to UGR | | | | | | | | | | | |
|--|-------------|--|------|------|------|-------------|---|------|------|------|------|
| ρ Ceiling | 70 | 70 | 50 | 50 | 30 | 70 | 70 | 50 | 50 | 30 | 30 |
| ρ Walls | 50 | 30 | 50 | 30 | 30 | 50 | 30 | 50 | 30 | 30 | 30 |
| ρ Floor | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 |
| Room Size X Y | | Viewing direction at right angles to lamp axis | | | | | Viewing direction parallel to lamp axis | | | | |
| 2H | 2H | 2.8 | 3.4 | 3.0 | 3.6 | 3.8 | 3.6 | 4.3 | 3.8 | 4.5 | 4.6 |
| | 3H | 6.2 | 6.9 | 6.5 | 7.1 | 7.3 | 7.5 | 8.1 | 7.8 | 8.3 | 8.6 |
| | 4H | 8.2 | 8.8 | 8.5 | 9.0 | 9.3 | 9.3 | 9.9 | 9.6 | 10.2 | 10.4 |
| | 6H | 10.4 | 11.0 | 10.8 | 11.3 | 11.5 | 11.6 | 12.2 | 11.9 | 12.4 | 12.7 |
| | 8H | 11.6 | 12.1 | 11.9 | 12.4 | 12.7 | 12.9 | 13.4 | 13.2 | 13.7 | 13.9 |
| 4H | 2H | 4.1 | 4.7 | 4.4 | 4.9 | 5.2 | 4.7 | 5.3 | 5.0 | 5.5 | 5.8 |
| | 3H | 7.8 | 8.3 | 8.2 | 8.6 | 8.9 | 8.7 | 9.2 | 9.1 | 9.5 | 9.8 |
| | 4H | 9.9 | 10.3 | 10.3 | 10.7 | 11.0 | 10.7 | 11.2 | 11.1 | 11.5 | 11.8 |
| | 6H | 12.2 | 12.6 | 12.6 | 12.9 | 13.3 | 13.2 | 13.5 | 13.6 | 13.9 | 14.3 |
| | 8H | 13.4 | 13.7 | 13.8 | 14.1 | 14.5 | 14.5 | 14.8 | 14.9 | 15.2 | 15.6 |
| 8H | 2H | 14.9 | 15.2 | 15.3 | 15.6 | 16.0 | 16.0 | 16.3 | 16.5 | 16.7 | 17.1 |
| | 4H | 10.9 | 11.2 | 11.3 | 11.6 | 12.0 | 11.5 | 11.8 | 11.9 | 12.2 | 12.6 |
| | 6H | 13.3 | 13.6 | 13.8 | 14.0 | 14.4 | 14.1 | 14.4 | 14.6 | 14.8 | 15.2 |
| | 8H | 14.8 | 15.0 | 15.2 | 15.4 | 15.9 | 15.7 | 15.9 | 16.1 | 16.3 | 16.8 |
| | 12H | 16.4 | 16.6 | 16.9 | 17.0 | 17.5 | 17.4 | 17.6 | 17.9 | 18.0 | 18.5 |
| 12H | 4H | 11.2 | 11.4 | 11.6 | 11.8 | 12.3 | 11.7 | 12.0 | 12.1 | 12.4 | 12.8 |
| | 6H | 13.7 | 13.9 | 14.2 | 14.4 | 14.8 | 14.4 | 14.6 | 14.9 | 15.0 | 15.5 |
| | 8H | 15.3 | 15.4 | 15.7 | 15.9 | 16.4 | 16.0 | 16.2 | 16.5 | 16.7 | 17.2 |
| Variation of the observer position for the luminaire distances S | | | | | | | | | | | |
| S = 1.0H | +0.2 / -0.1 | | | | | +0.2 / -0.1 | | | | | |
| S = 1.5H | +0.3 / -0.3 | | | | | +0.3 / -0.3 | | | | | |
| S = 2.0H | +0.5 / -0.5 | | | | | +0.5 / -0.5 | | | | | |
| Standard table Correction Summand | --- | | | | | --- | | | | | |
| Corrected Glare Indices referring to 3750lm Total Luminous Flux | | | | | | | | | | | |