




### DIMENSIONS



### ACCESSORIES

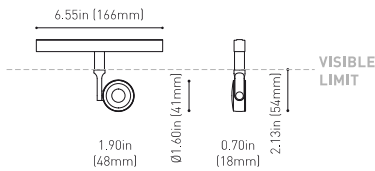

TRACK 48V OPTIONS

### AWARDS



### PRODUCT

**Name** SIX XS 48V UL DIM DALI 17° 3000K WTW

**Reference** U3350211WTW

**Color** Textured white - White track

**Category** TRACKLIGHTS

### LIGHT SOURCE

**Type** LED

**Gross luminous flux** 500 Lm

**Color temperature** 3000 K

**Chromatic stability** MacAdam Step 2

**Color Rendering Index** CRI>90

**Power** 4.5 W

**Current** 500 mA

**Efficacy** 111 Lm/W

**LED lifespan** L90B10>55.000h

### LIGHTING FIXTURE | PHOTOMETRIC DATA

**Lighting efficiency** 90%

**Delivered luminous flux** 450 Lm

**Light beam angle** 17°

### LIGHTING FIXTURE | ELECTRICAL DATA

**Driver** Included

**Power values of the system** 5,00 W

**Dimming** DALI

### OTHER DATA

**DAMP**

**Swivel angle** 310°

**Rotation angle** 360°

**Track type** Track 48V

**Weight** 0.25 lb | 112 gr

**Packaged weight** 0.35 lb | 160 gr

**Packaging dimensions** 7.48x5.71x0.94 in | 190x145x24 mm


**Materials** Aluminium - Polycarbonate




<b>Environmental location</b>	DAMP
<b>Swivel angle</b>	310°
<b>Rotation angle</b>	360°
<b>Track type</b>	Track 48V
<b>Weight</b>	0.25 lb   112 gr
<b>Packaged weight</b>	0.35 lb   160 gr
<b>Packaging dimensions</b>	7.48x5.71x0.94 in   190x145x24 mm
<b>Materials</b>	Aluminium - Polycarbonate

Six 48V is a family of spotlights for low voltage tracklight applications that stands out for its lightness and elegance. Available in L, M, S, and XS, its body; disk looking, rounded shaped, encloses an innovative combination of reflector and lens. The combined action of both, allows Six to direct light rays with the maximum uniformity in a very small distance that, at the same time, has made possible its differential design-reduced and minimalist-. In addition, Six can be freely articulated due to its airy arm which allows the spotlight to be orientated in any direction.

POLAR DIAGRAM

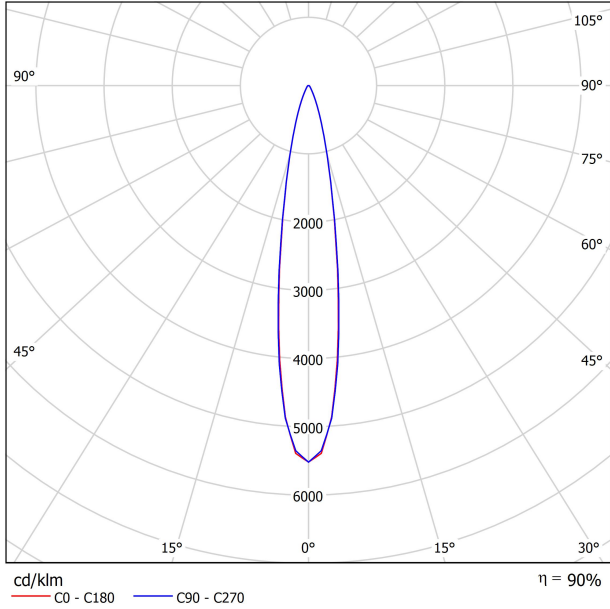

CONICAL DIAGRAM

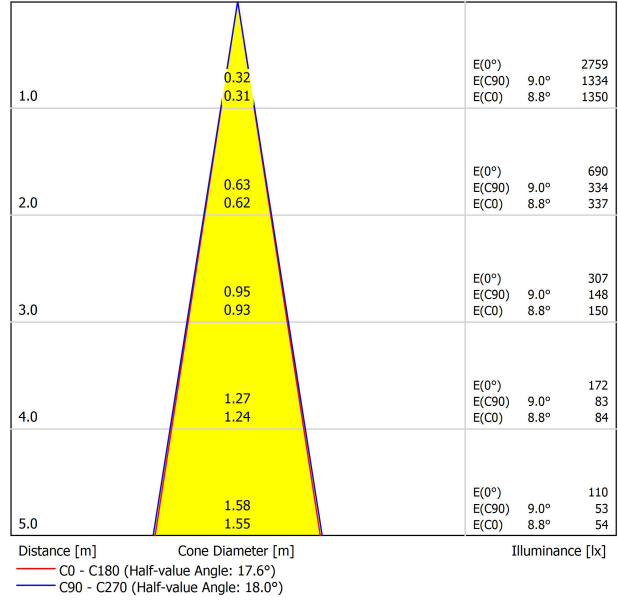



TRACK 48V TRIMLESS UL

TRACK 48V TRIMLESS 3.28ft (1m) UL	U338-01-00-	N	WT
TRACK 48V TRIMLESS 6.56ft (2m) UL	U338-02-00-	N	WT
TRACK 48V TRIMLESS Corner 90° One Plane UL	U338-06-00-	N	WT
TRACK 48V TRIMLESS Corner 90° Two Planes UL	U338-07-00-	N	WT

PLASTERBOARD CEILING MANDATORY THICKNESS 0.50in (12.5mm)  
RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING

TRACK 48V TRIMLESS  
Corner 90° One Plane UL



\*Electrical connection not included

TRACK 48V TRIMLESS  
Corner 90° Two Planes UL



\*Electrical connection not included


TRIMLESS INSTALLATION GUIDE  
<https://youtu.be/SVWNEfblfVY>




TRACK 48V SURFACE UL

TRACK 48V SURFACE 3.28ft (1m) UL	U338-11-00-	NT	WT
TRACK 48V SURFACE 6.56ft (2m) UL	U338-12-00-	NT	WT
TRACK 48V SURFACE Corner 90° One Plane UL	U338-14-00-	NT	WT

TRACK 48V SURFACE  
Corner 90° One Plane UL




\*Electrical connection not included



TRACK 48V SURFACE SHORT UL

TRACK 48V SURFACE SHORT 3.28ft (1m) UL	U338-21-00-	NT	WT
TRACK 48V SURFACE SHORT 6.56ft (2m) UL	U338-22-00-	NT	WT
TRACK 48V SURFACE SHORT Corner 90° One Plane UL	U338-24-00-	NT	WT

TRACK 48V SURFACE SHORT  
Corner 90° One Plane UL



\*Electrical connection not included



		P	V	D
<b>CONSTANT VOLTAGE LED POWER SUPPLY</b>	<b>U100-00-78</b>	96W	48V	8.16 x 2.97 x 1.30 in 207 x 75.4 x 33 mm

120 & 277 V | 50/60 Hz

UL DROP VOLTAGE TABLE

POWER	CABLE SECTION	CABLE LENGTH			
		16.40ft 5m	32.80ft 10m	65.62ft 20m	98.43ft 30m
96W	AWG 16	164ft	164ft	131.32ft	82ft
		50m	50m	40m	25m

ALL 48V TRACK UL



**Live-End Connector 48V UL**  
U338-00-01- | N | W |




**L-JOINT Connector 48V UL**  
U338-00-12- | N | W |



**Corner 90° Connector One Plane 48V UL**  
U338-00-24- | N | W |

\*Not suitable for trimless version



**Central Connector 48V UL**  
U338-00-02- | N | W |



**Wireless Control 48V UL**  
U434-01-31- | N | W |  
Casambi/AAG Stucchi App



**Cover Gap 3,28 ft (1m) 48V UL**  
U338-00-30- | N |

TRIMLESS 48V UL



**Trimless T-Bracket 48V UL**  
U338-00-03



**Clamp for M6 ROD UL**  
U338-00-09  
\*See accessories quantities



**Trimless Long T-Bracket 48V UL**  
U338-00-04



**Track Clamp UL**  
U338-00-10  
\*See accessories quantities



**Trimless Straight Joiners 48V (2 units) UL**  
U338-00-05- | N | WT |



**Suspension Kit UL**  
U338-00-08  
\*See accessories quantities



**Trimless Plaster Installation Guard 3.28ft (1m) 48V UL**  
U338-00-21

**\* SUGGESTED MOUNTING ACCESSORIES QUANTITIES**  
3.28ft (1000mm) - 2 Pcs.  
6.56ft (2000mm) - 3 Pcs.  
9.84ft (3000mm) - 4 Pcs.

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V UL



**Surface Straight Joiner 48V UL**  
U338-00-11

TRIMLESS, SURFACE & SUSPENSION 48V UL



End 48V UL

U338-00-06- | NT | WT |



End feed 48V UL

U338-00-07- | NT | WT |

SURFACE SHORT & SUSPENSION SHORT 48V UL



Short End 48V UL

U338-00-18- | NT | WT |



Short End feed 48V UL

U338-00-19- | NT | WT |

SUSPENSION & SUSPENSION SHORT 48V UL



Suspension Kit 48V [2 units] UL

U338-00-15- | NT | WT |



Suspension feed Kit 48V UL

U338-00-17- | N | W |



\*For remote power supply