



DIMENSIONS



AWARDS



PRODUCT

| | |
|-----------|--|
| Name | BLACK FOSTER SUSP 1600 UL FLOOD 4000K NT |
| Reference | U3212012NT |
| Color | Textured black |
| Category | SUSPENSION |

LIGHT SOURCE

| | |
|-----------------------|-----------------|
| Type | LED |
| Gross luminous flux | 3750 Lm |
| Color temperature | 4000 K |
| Chromatic stability | MacAdam Step 3 |
| Color Rendering Index | CRI>90 |
| Power | 31.5 W |
| Current | 700 mA |
| Efficacy | 119 Lm/W |
| LED lifespan | L80B10 >60,000h |

LIGHTING FIXTURE | PHOTOMETRIC DATA

| | |
|-------------------------|---------|
| Lighting efficiency | 92% |
| Delivered luminous flux | 3450 Lm |
| Light beam angle | 38° |

LIGHTING FIXTURE | ELECTRICAL DATA

| | |
|----------------------------|--|
| Driver | Included: ERP-PSB series or similar |
| Power values of the system | 37,00 W |
| Frequency | 50/60 Hz |
| Dimming | 0-10V / TRIAC/ELV dimming only at 120V |


OTHER DATA

| | |
|---------------------------------|---|
| Environmental location | DAMP |
| Junction box cover | Included. For octagonal Junction box |
| Junction box cover color | Textured black. Other finishing, please consult |
| Junction box cover measurements | Ø5.51 in Ø140 mm |
| Cord Length | MAX. 10 ft MAX. 3.05 m |
| Fast adjustment tensioner | Yes |
| Weight | 9.42 lb 4275 gr |
| Packaged weight | 13.01 lb 5900 gr |
| Packaging dimensions | Ø6.10x68.31 in Ø155x1735 mm |
| Materials | Aluminium - Acrylonitrile Butadiene Styrene - Polycarbonate |




Black Foster Suspension is the product that transfers the claimed effect "The Invisible Black" to a linear suspended system. It is composed by a series of modules which combine light emissions with dark segments. Nevertheless, whether it is On or Off, Black Foster always preserves the aesthetic of a perfect dark line.

POLAR DIAGRAM

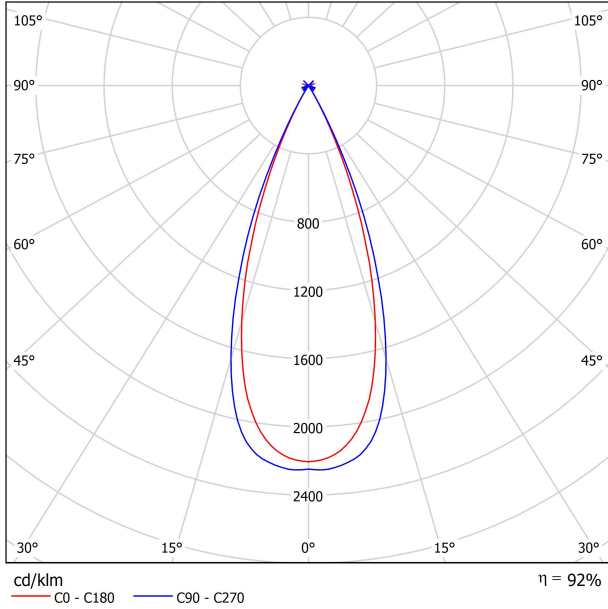

CONICAL DIAGRAM

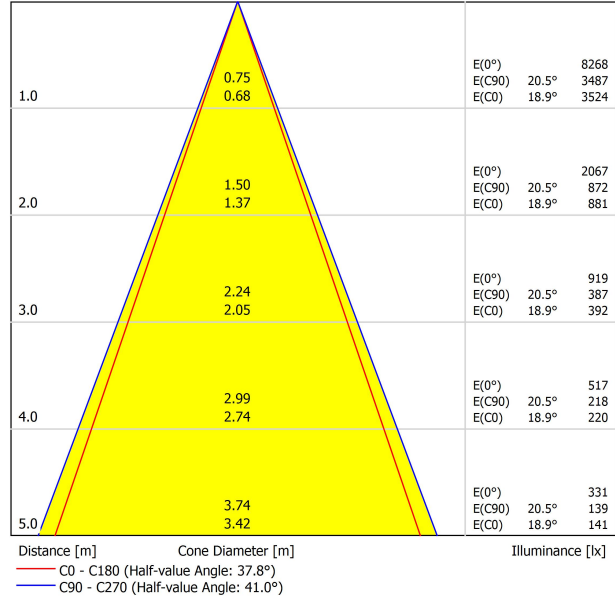

UGR

| Glare Evaluation According to UGR | | | | | | | | | | | |
|--|-------------|--|-------|-------|-------|-------------|---|-------|-------|-------|-------|
| ρ Ceiling | 70 | 70 | 50 | 50 | 30 | 70 | 70 | 50 | 50 | 30 | |
| ρ Walls | 50 | 30 | 50 | 30 | 30 | 50 | 30 | 50 | 30 | 30 | |
| ρ Floor | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | |
| Room Size X Y | | Viewing direction at right angles to lamp axis | | | | | Viewing direction parallel to lamp axis | | | | |
| 2H | 2H | -15.0 | -14.4 | -14.7 | -14.2 | -14.0 | -15.3 | -14.7 | -15.0 | -14.5 | -14.3 |
| | 3H | -10.9 | -10.3 | -10.6 | -10.0 | -9.8 | -13.4 | -12.8 | -13.1 | -12.6 | -12.4 |
| | 4H | -10.8 | -10.3 | -10.5 | -10.0 | -9.8 | -8.9 | -8.3 | -8.6 | -8.1 | -7.8 |
| | 6H | -9.5 | -9.0 | -9.2 | -8.7 | -8.5 | -5.8 | -5.3 | -5.5 | -5.0 | -4.8 |
| | 8H | -8.3 | -7.9 | -8.0 | -7.6 | -7.3 | -5.3 | -4.8 | -4.9 | -4.5 | -4.2 |
| 12H | -7.8 | -7.3 | -7.4 | -7.0 | -6.7 | -5.0 | -4.6 | -4.7 | -4.3 | -4.0 | |
| 4H | 2H | -12.8 | -12.3 | -12.5 | -12.0 | -11.8 | -13.0 | -12.4 | -12.7 | -12.2 | -11.9 |
| | 3H | -9.7 | -9.3 | -9.4 | -9.0 | -8.7 | -11.1 | -10.7 | -10.8 | -10.4 | -10.1 |
| | 4H | -9.3 | -8.9 | -9.0 | -8.6 | -8.3 | -7.0 | -6.6 | -6.6 | -6.3 | -5.9 |
| | 6H | -7.9 | -7.6 | -7.5 | -7.2 | -6.8 | -3.5 | -3.1 | -3.1 | -2.8 | -2.4 |
| | 8H | -6.2 | -5.9 | -5.8 | -5.6 | -5.2 | -2.9 | -2.6 | -2.5 | -2.2 | -1.8 |
| 12H | -5.7 | -5.5 | -5.3 | -5.1 | -4.7 | -2.5 | -2.3 | -2.1 | -1.9 | -1.5 | |
| 8H | 4H | -7.1 | -6.9 | -6.7 | -6.5 | -6.1 | -5.9 | -5.6 | -5.5 | -5.2 | -4.8 |
| | 6H | -5.5 | -5.3 | -5.1 | -4.9 | -4.4 | -2.1 | -1.9 | -1.7 | -1.5 | -1.0 |
| | 8H | -3.8 | -3.6 | -3.3 | -3.2 | -2.7 | -1.5 | -1.4 | -1.1 | -0.9 | -0.4 |
| | 12H | -3.4 | -3.3 | -3.0 | -2.8 | -2.3 | -0.8 | -0.7 | -0.4 | -0.2 | 0.2 |
| 12H | 4H | -6.6 | -6.4 | -6.2 | -6.0 | -5.5 | -5.8 | -5.6 | -5.4 | -5.2 | -4.7 |
| | 6H | -4.8 | -4.6 | -4.3 | -4.2 | -3.7 | -2.0 | -1.8 | -1.5 | -1.3 | -0.9 |
| | 8H | -3.2 | -3.1 | -2.7 | -2.6 | -2.1 | -1.3 | -1.2 | -0.8 | -0.7 | -0.2 |
| | | | | | | | | | | | |
| Variation of the observer position for the luminaire distances S | | | | | | | | | | | |
| S = 1.0H | +4.3 / -1.8 | | | | | +2.3 / -0.6 | | | | | |
| S = 1.5H | +6.8 / -2.0 | | | | | +4.2 / -1.0 | | | | | |
| S = 2.0H | +8.8 / -2.6 | | | | | +5.9 / -2.3 | | | | | |
| Standard table Correction Summand | --- | | | | | --- | | | | | |
| Corrected Glare Indices referring to 3750lm Total Luminous Flux | | | | | | | | | | | |