




### DIMENSIONS



### ACCESSORIES

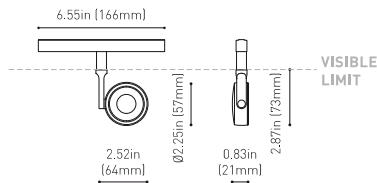

TRACK 48V OPTIONS

### AWARDS



### PRODUCT

Name	SIX S 48V UL DIM 0-10V 24° 2700K NT
Reference	U3330120NT
Color	Textured black
Category	TRACKLIGHTS

### LIGHT SOURCE

Type	LED
Gross luminous flux	1030 Lm
Color temperature	2700 K
Chromatic stability	MacAdam Step 2
Color Rendering Index	CRI>90
Power	8.5 W
Current	500 mA
Efficacy	121 Lm/W
LED lifespan	L80B10 >60.000h

### LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	84%
Delivered luminous flux	865 Lm
Light beam angle	24°

### LIGHTING FIXTURE | ELECTRICAL DATA

Driver	Included
Power values of the system	9,00 W
Dimming	0-10V

### OTHER DATA

Environmental location	DAMP
Swivel angle	310°
Rotation angle	360°
Track type	Track 48V
Weight	0.36 lb   164 gr
Packaged weight	0.46 lb   210 gr
Packaging dimensions	7.48x5.71x0.94 in   190x145x24 mm
Materials	Aluminium - Polycarbonate




SIX 48V is a family of spotlights for track applications that stands out for its minimalistic presence and maximum light output. Available in four different sizes, its body encloses an innovative combination of reflector and lens which allows SIX to direct light with the maximum uniformity in a very small distance. SIX can be freely orientated in any direction.

POLAR DIAGRAM



CONICAL DIAGRAM

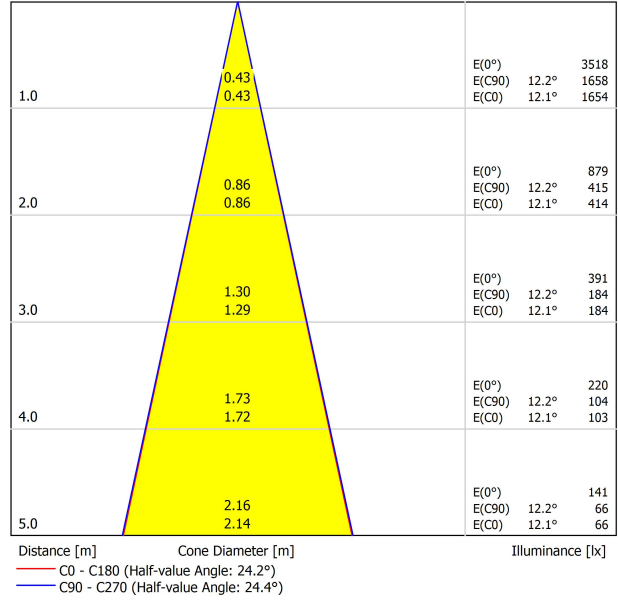



TRACK 48V TRIMLESS UL

TRACK 48V TRIMLESS 3.28ft (1m) UL	U338-01-00-	N	WT
TRACK 48V TRIMLESS 6.56ft (2m) UL	U338-02-00-	N	WT
TRACK 48V TRIMLESS Corner 90° One Plane UL	U338-06-00-	N	WT
TRACK 48V TRIMLESS Corner 90° Two Planes UL	U338-07-00-	N	WT

PLASTERBOARD CEILING MANDATORY THICKNESS 0.50in (12.5mm)  
RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING

TRACK 48V TRIMLESS  
Corner 90° One Plane UL



\*Electrical connection not included

TRACK 48V TRIMLESS  
Corner 90° Two Planes UL



\*Electrical connection not included

TRIMLESS INSTALLATION GUIDE  
<https://youtu.be/SVWNEfblfVY>



TRACK 48V SURFACE UL

TRACK 48V SURFACE 3.28ft (1m) UL	U338-11-00-	NT	WT
TRACK 48V SURFACE 6.56ft (2m) UL	U338-12-00-	NT	WT
TRACK 48V SURFACE Corner 90° One Plane UL	U338-14-00-	NT	WT

TRACK 48V SURFACE  
Corner 90° One Plane UL



\*Electrical connection not included



TRACK 48V SURFACE SHORT UL

TRACK 48V SURFACE SHORT 3.28ft (1m) UL	U338-21-00-	NT	WT
TRACK 48V SURFACE SHORT 6.56ft (2m) UL	U338-22-00-	NT	WT
TRACK 48V SURFACE SHORT Corner 90° One Plane UL	U338-24-00-	NT	WT

TRACK 48V SURFACE SHORT  
Corner 90° One Plane UL



\*Electrical connection not included



		P	V	D
<b>CONSTANT VOLTAGE LED POWER SUPPLY</b>	<b>U100-00-78</b>	96W	48V	8.16 x 2.97 x 1.30 in 207 x 75.4 x 33 mm

120 & 277 V | 50/60 Hz

UL DROP VOLTAGE TABLE

POWER	CABLE SECTION	CABLE LENGHT			
		16.40ft 5m	32.80ft 10m	65.62ft 20m	98.43ft 30m
96W	AWG 16	TRACK LENGHT			
		164ft 50m	164ft 50m	131.32ft 40m	82ft 25m

ALL 48V TRACK UL



**Live-End Connector 48V UL**  
U338-00-01- | N | W |




**L-JOINT Connector 48V UL**  
U338-00-12- | N | W |



**Corner 90° Connector One Plane 48V UL**  
U338-00-24- | N | W |


\*Not suitable for trimless version



**Central Connector 48V UL**  
U338-00-02- | N | W |



**Wireless Control 48V UL**  
U434-01-31- | N | W |  
Casambi/AAG Stucchi App



**Cover Gap 3,28 ft (1m) 48V UL**  
U338-00-30- | N |

TRIMLESS 48V UL



**Trimless T-Bracket 48V UL**  
U338-00-03



**Clamp for M6 ROD UL**  
U338-00-09  
\*See accessories quantities




**Trimless Long T-Bracket 48V UL**  
U338-00-04



**Track Clamp UL**  
U338-00-10  
\*See accessories quantities



**Trimless Straight Joiners 48V (2 units) UL**  
U338-00-05- | N | WT |



**Suspension Kit UL**  
U338-00-08  
\*See accessories quantities



**Trimless Plaster Installation Guard 3.28ft (1m) 48V UL**  
U338-00-21

**\* SUGGESTED MOUNTING ACCESSORIES QUANTITIES**  
3.28ft (1000mm) - 2 Pcs.  
6.56ft (2000mm) - 3 Pcs.  
9.84ft (3000mm) - 4 Pcs.

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V UL



**Surface Straight Joiner 48V UL**  
U338-00-11

TRIMLESS, SURFACE & SUSPENSION 48V UL



End 48V UL

U338-00-06- | NT | WT |



End feed 48V UL

U338-00-07- | NT | WT |

SURFACE SHORT & SUSPENSION SHORT 48V UL



Short End 48V UL

U338-00-18- | NT | WT |



Short End feed 48V UL

U338-00-19- | NT | WT |

SUSPENSION & SUSPENSION SHORT 48V UL



Suspension Kit 48V [2 units] UL

U338-00-15- | NT | WT |



Suspension feed Kit 48V UL

U338-00-17- | N | W |



\*For remote power supply